


TERMINALS SPECIFICATION DRAWING

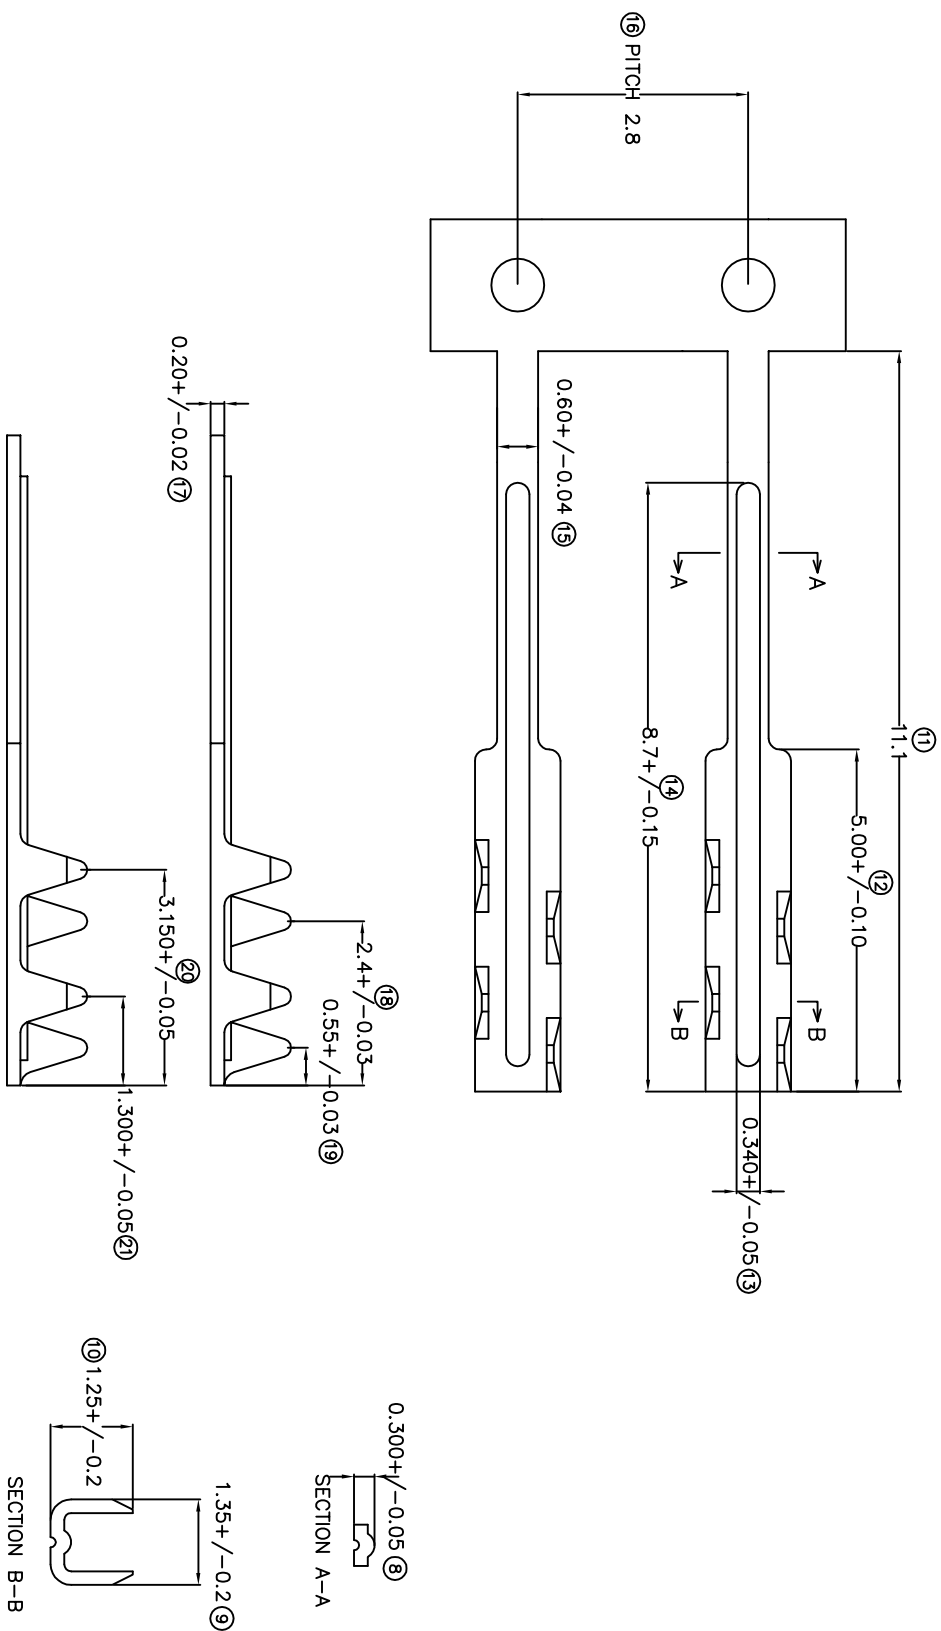

FOR REFERENCE ONLY

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TD +120°C.
- 5) VOL TAGE-MAX [V/LT S] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 100 WITH BASE NICKLE PLATED THICKNESS 40μ INCH.
- 3) PACKING QTY : 30000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : - MM.
- 1) APPLICABLE WIRE RANGE : FPC.

SPECIFICATION :

MATERIAL: t0.20 BRASS		SOLDER TIN	
C2680		TREATMENT SELECTIVE	
DIMENSIONS : MM		DWN: KS YEW	
TOLERANCE UNLESS OTHERWISE SPECIFIED:		CHK: SC CHOO	
REVISION: 03		APVD: CHUANG	
X.XXX +/-0.05		SCALE : FREE	
X.XX +/-0.10		DRAWING NO:	
X.X +/-0.20		PART NAME:	
X +/-0.50		FPC PIN	
EFFECTIVE DATE : 19/7/07		APPLICABLE (1) TERMINALS (2) HOUSING	
SHEET OF : 1 / 1		(1) - (2) -	