


TERMINALS SPECIFICATION DRAWING

UNCONTROLLED COPY

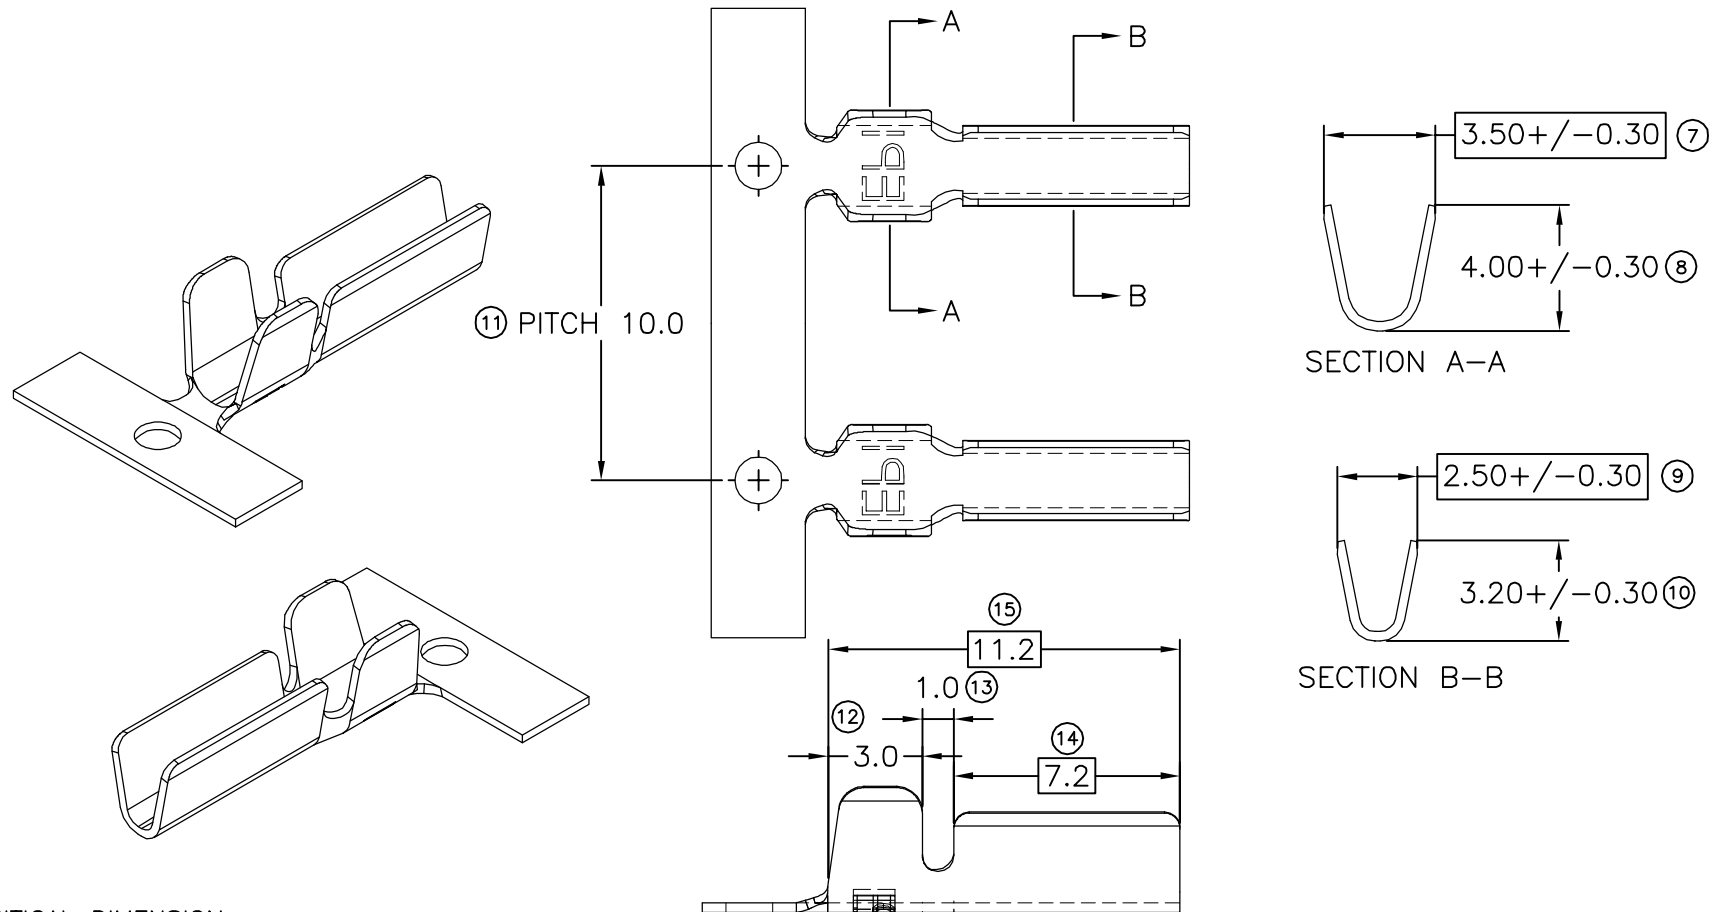


□ CRITICAL DIMENSION

- 6) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 5) TEMPERATURE RANGE -40°C TO +120°C.
- 4) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 3) PACKING QTY : 5000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.2 MM.
- 1) APPLICABLE WIRE RANGE : 0.83-0.37 MM².

SPECIFICATION :

FOR REFERENCE ONLY

REVISION:
01



SHEET OF :
1 / 1

MATERIAL:
t0.30 BRASS
C2680

DIMENSIONS : MM

TOLERANCE UNLESS
OTHERWISE SPECIFIED:

X.XXX +/-0.05
X.XX +/-0.10
X.X +/-0.20
X +/-0.50

EFFECTIVE DATE :
1/4/10

PRE-TIN PLATED

12145-2T

NONE

12145-1

TREATMENT SELECTIVE

PART NUMBER

PREPARE BY:
KS YEW

REVIEWED BY:
CH ANG

APPROVED BY:
YL CHUANG

SCALE : FREE

DRAWING NO:
A1540

EPI Terminals & Connectors
Elamp Precision Industry(M) Sdn.Bhd.

PART NAME:
SPLICE TERMINALS

APPLICABLE (1) TERMINALS (2) HOUSING

(1) -

(2) -

01	1/4/10	ADD ITEM 12145-2T
00	9/11/09	1ST ISSUE
TEMP	23/4/09	FOR TRIAL RUN ONLY
REV.	DATE	AMENDMENT