
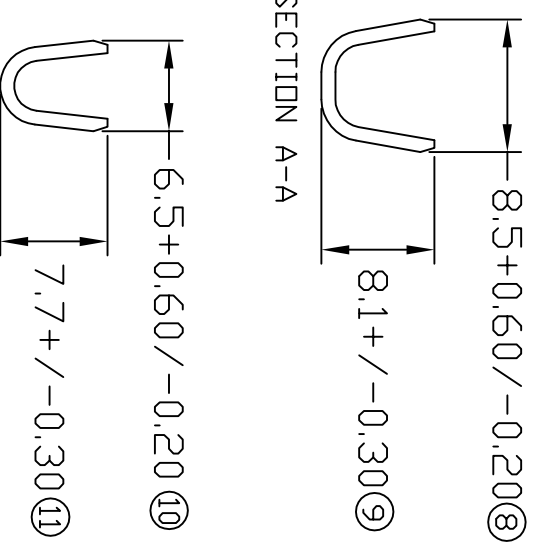


# TERMINALS SPECIFICATION DRAWING

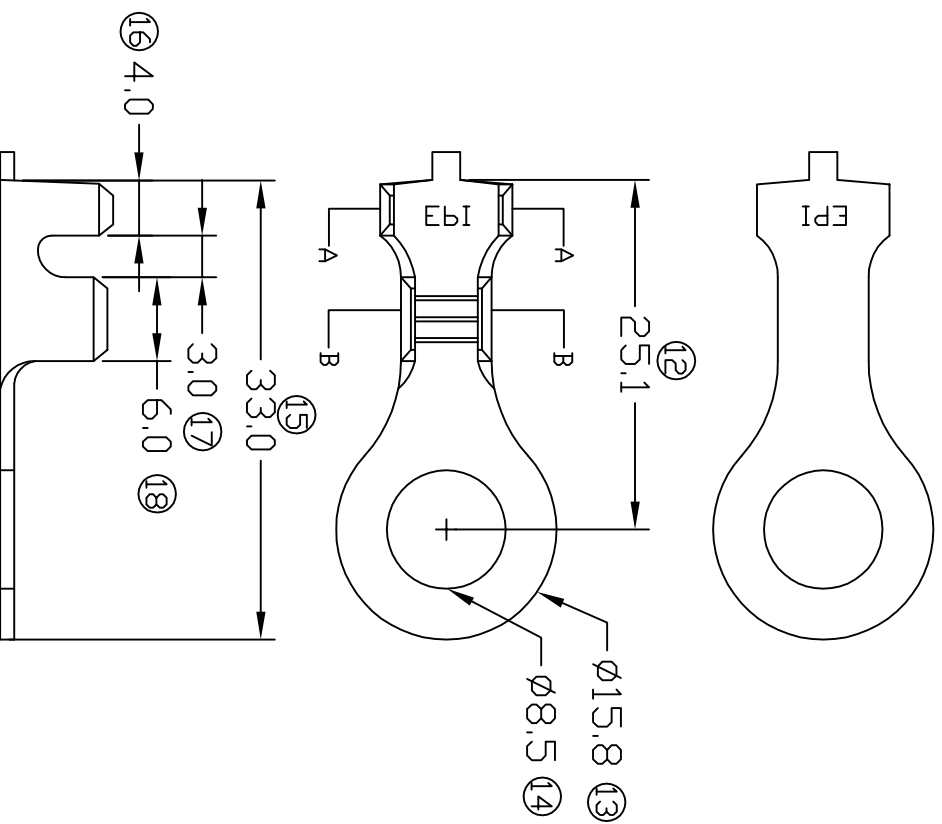

SECTION B-B

FOR REFERENCE ONLY

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TO +120°C.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40  $\mu$  INCH.
- 3) PACKING QTY : - PCS/REEL.
- 2) WIRE INSULATION (OD) : 4.7MM.
- 1) APPLICABLE WIRE RANGE : 5.77-294MM<sup>2</sup>.

SPECIFICATION:

|                                                                                                       |                                                                           |                                      |                |
|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|--------------------------------------|----------------|
| MATERIAL:<br>t1.0 BRASS<br>C2680                                                                      | NDINE                                                                     |                                      | 1401685-1      |
|                                                                                                       | PRE-TIN PLATED                                                            |                                      | 1401685-2T     |
|                                                                                                       | TREATMENT SELECTIVE                                                       |                                      | PART NUMBER    |
|                                                                                                       | <b>EPI</b> Terminals & Connectors<br>Elamp Precision Industry(M) Sdn.Bhd. |                                      |                |
| DIMENSIONS : MM                                                                                       | DWN: KS YE'W                                                              | PART NAME:<br>RING TONGUE TERMINALS  |                |
| TOLERANCE UNLESS<br>OTHERWISE SPECIFIED:<br>X.XXX +/-0.05<br>X.XX +/-0.10<br>X.X +/-0.20<br>X +/-0.50 | CHK: SC CHOO                                                              | APPLICABLE (1) TERMINALS (2) HOUSING |                |
|                                                                                                       | APVD: Y'L CHUANG                                                          |                                      |                |
|                                                                                                       | SCALE : FREE                                                              |                                      |                |
|                                                                                                       | DRAWING NO:                                                               |                                      |                |
| SHEET OF :<br>1 / 1                                                                                   | EFFECTIVE DATE :<br>4/7/07                                                | A1493                                | (1) -<br>(2) - |