
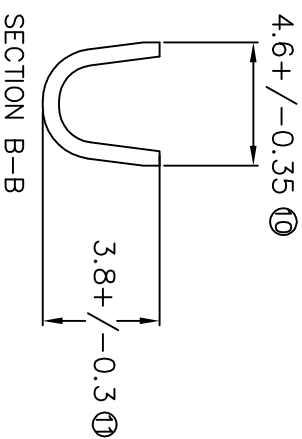
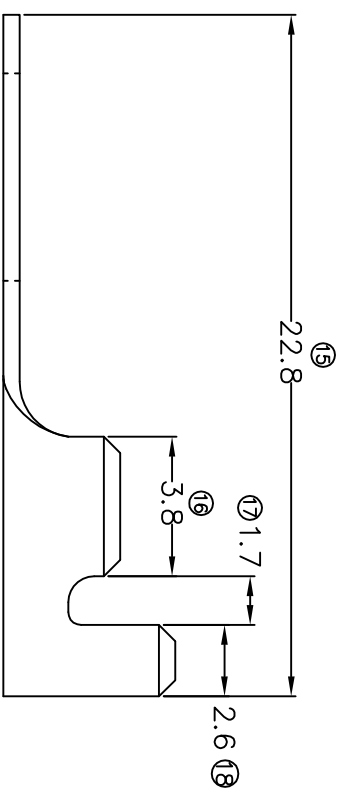
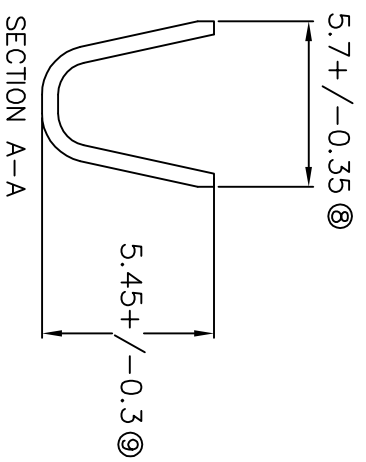


TERMINALS SPECIFICATION DRAWING

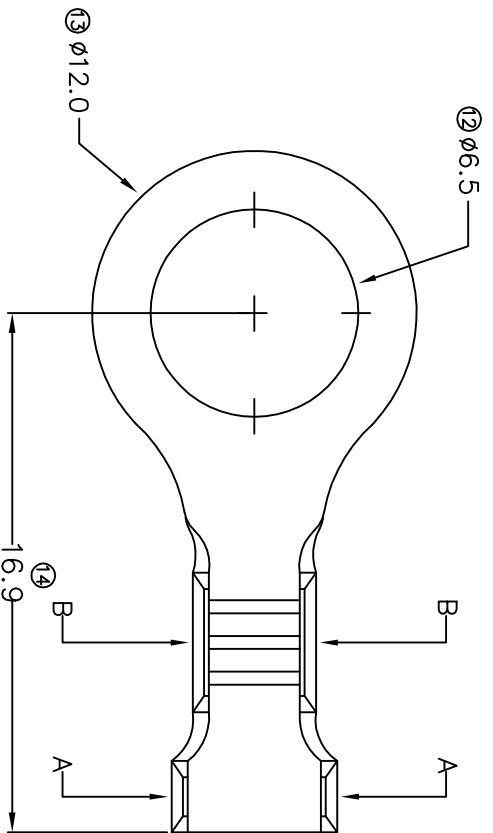

FOR REFERENCE ONLY

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TD +120°C.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40 μ INCH.
- 3) PACKING QTY : 3500 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 3.1MM.
- 1) APPLICABLE WIRE RANGE : 1.89-0.96MM².

SPECIFICATION :

MATERIAL: t0.50 BRASS C2680	TIN PLATING		141265A-2
	NONE		141265A-1
	TREATMENT SELECTIVE		PART NUMBER
	DWN: KS YEW		
DIMENSIONS : MM TOLERANCE UNLESS OTHERWISE SPECIFIED:	CHK: SC CHOO	EPI Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.	
	APVD: Y.L CHUANG		
	SCALE : FREE		
	DRAWING NO:		
EFFECTIVE DATE : 4/5/07		A1387	(1) - (2) -