


TERMINALS SPECIFICATION DRAWING

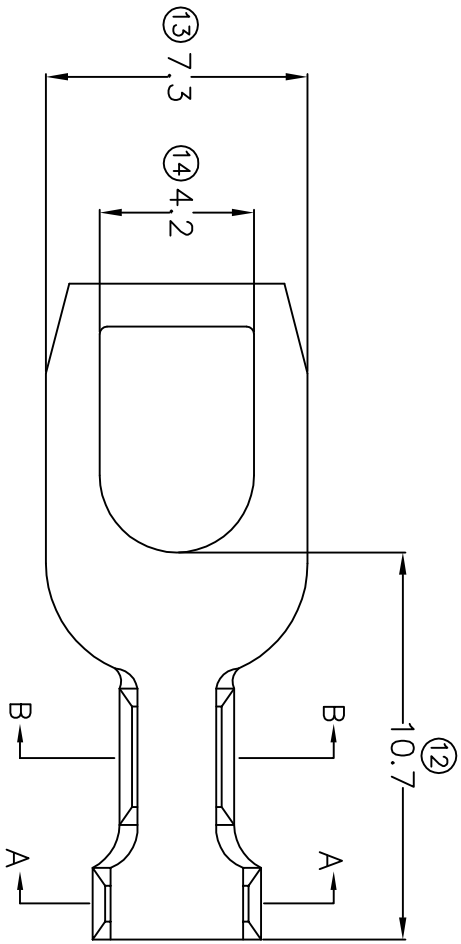

4.9+/-0.35 ⑧


4.2+/-0.3 ⑨

SECTION A-A

3.4+/-0.35 ⑩

3.2+/-0.3 ⑪

SECTION B-B

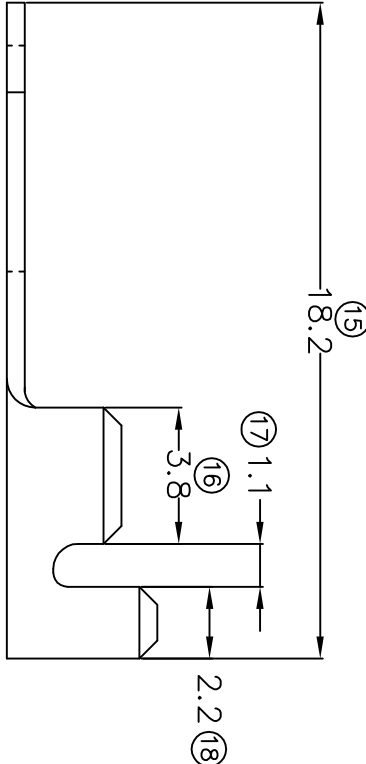

FOR REFERENCE ONLY

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TO +120°C.
- 5) VOL TAGE-MAX [VOLT S] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 8000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.4MM.
- 1) APPLICABLE WIRE RANGE : 1.10-0.56MM².

SPECIFICATION :

MATERIAL: t0.50 BRASS C2680	TIN PLATING		157343-2
	NONE		157343-1
	TREATMENT SELECTIVE		PART NUMBER
	DWN: KS YEW		EPI Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.
DIMENSIONS : MM		PART NAME: SPADE TERMINALS APPLICABLE (1) TERMINALS (2) HOUSING	
TOLERANCE UNLESS OTHERWISE SPECIFIED:			
CHK: SC CHOO			
APVD: YL CHUANG			
REVISION:	03	SCALE : FREE	(1) _____
	X:XXX +/-0.05	DRAWING NO:	(2) _____
	X:XX +/-0.10		
X:X +/-0.20			
X +/-0.50			
SHEET OF :	1 / 1	A1296	
EFFECTIVE DATE :			
11/7/07			