






TERMINALS SPECIFICATION DRAWING

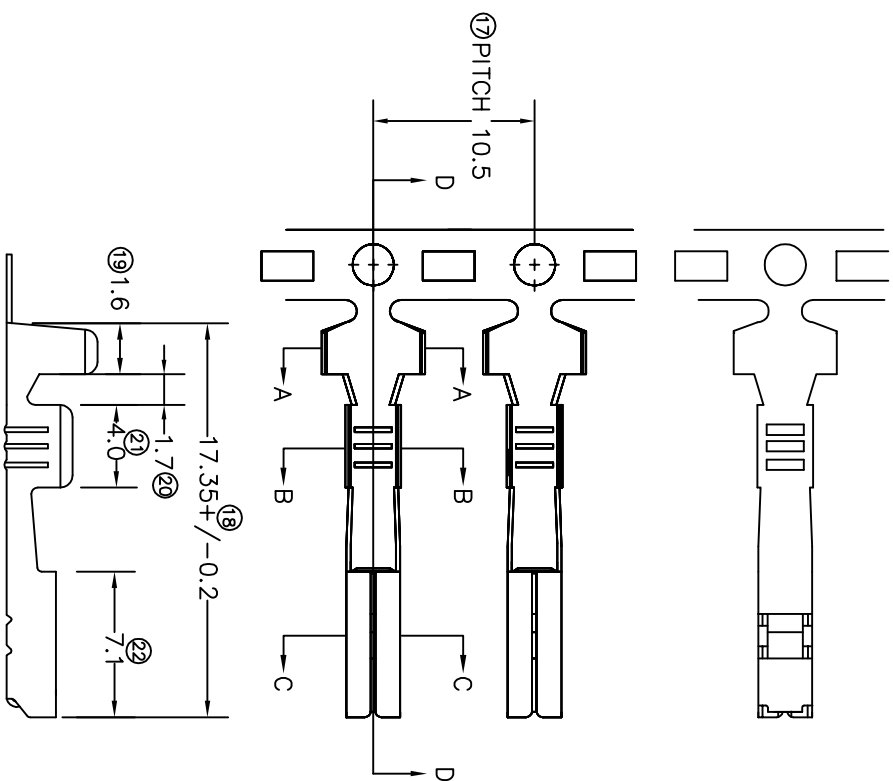

FOR REFERENCE ONLY

- 10) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 9) TEMPERATURE RANGE -40°C TD +120°C.
- 8) VOLTAGE-MAX [VOLTAGE] PER WIRE SPECIFICATION.
- 7) MATCHING WITH TAB t0.6 X W2.2.
- 6) TENSILE FORCE : MIN 0.40KG.
- 5) INSERT FORCE : MAX 0.70KG.
- 4) THICKNESS PLATING MORE THAN 40µ INCH.
- 3) PACKING QTY : 5000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.3MM.
- 1) APPLICABLE WIRE RANGE : 1.27-0.57MM².

SPECIFICATION :

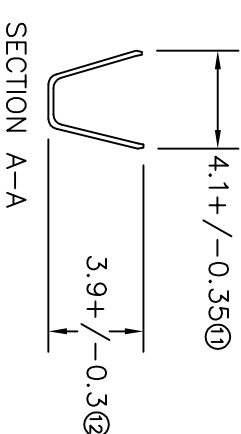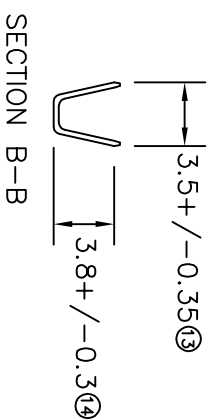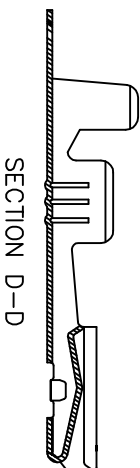

MATERIAL: to.25 PHOSPHOR BRONZE C5191		PRE-TIN PLATED TREATMENT SELECTIVE		17090KM-2T PART NUMBER	
DIMENSIONS : MM		DWN: KS YEW		EPI Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd. PART NAME: 090 SERIES FEMALE TERMINALS APPLICABLE (1) TERMINALS (2) HOUSING	
TOLERANCE UNLESS OTHERWISE SPECIFIED:		CHK: SC CHOO			
X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50		APVD: Y.L CHUANG			
SCALE : FREE		DRAWING NO:			
EFFECTIVE DATE : 11/7/07		A1220		(1) 27090S/M/H (2) 090 SERIES HOUSING	
REVISION: 05		SHEET OF : 1 / 1			