

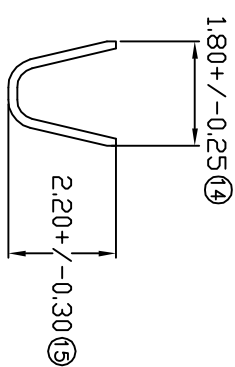
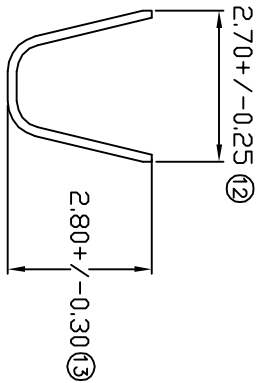
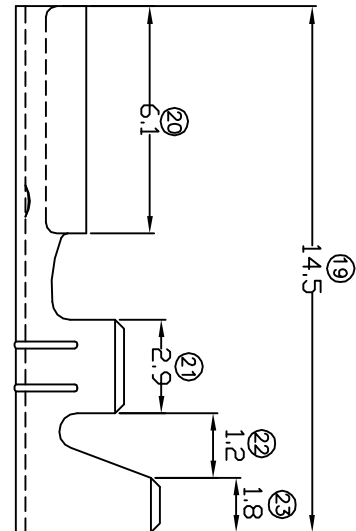


TERMINALS SPECIFICATION DRAWING

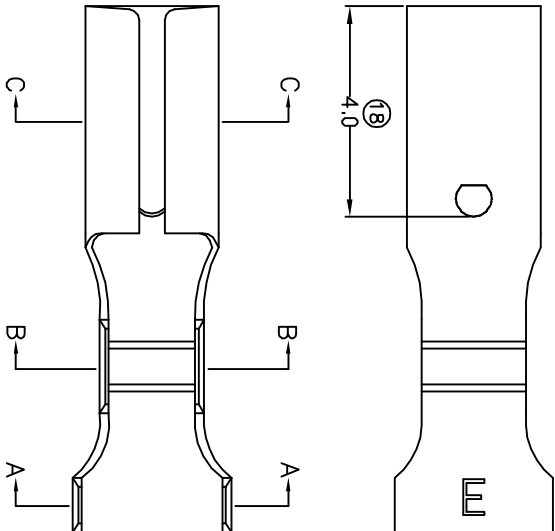

FOR REFERENCE ONLY

- 11) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 10) TEMPERATURE RANGE -40°C TO +120°C.
- 9) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 8) 17 FOR REFERENCE ONLY.
- 7) MATCHING WITH TAB t0.8 X W2.8.
- 6) TENSILE FORCE : MIN 2.45KG.
- 5) INSERT FORCE : MAX 3.30KG.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 15000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 1.6MM.
- 1) APPLICABLE WIRE RANGE : 0.35-0.15MM².

SPECIFICATION :

MATERIAL: to.25 BRASS C2680	TIN PLATING		17110BS(0.8)-2
	NONE		17110BS(0.8)-1
	TREATMENT SELECTIVE		PART NUMBER
	DWN: KS YEW		EPi Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.
TOLERANCE UNLESS OTHERWISE SPECIFIED:	CHK: C.Y CHK: CHUANG		
	APVD: CHUANG Y.L		
	PART NAME: 110 SERIES FEMALE TERMINALS		
	APPLICABLE (1) TERMINALS (2) HOUSING		
REVISION: 03	X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X.X +/-0.50	DRAWING NO: (1) TAB to.8 X W2.8 (2) -	
			
SHEET OF : 1 / 1	EFFECTIVE DATE : 20/1/09	A1468	