
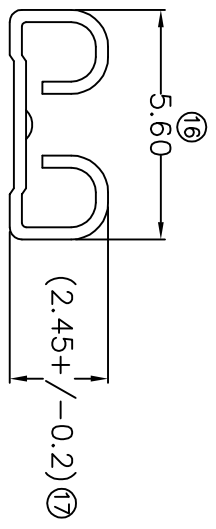
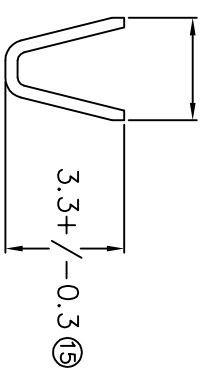

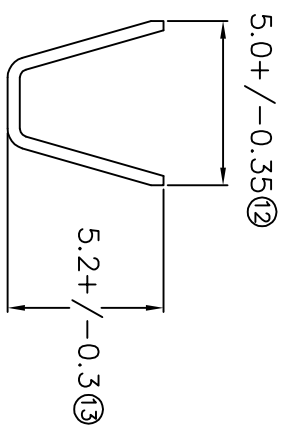
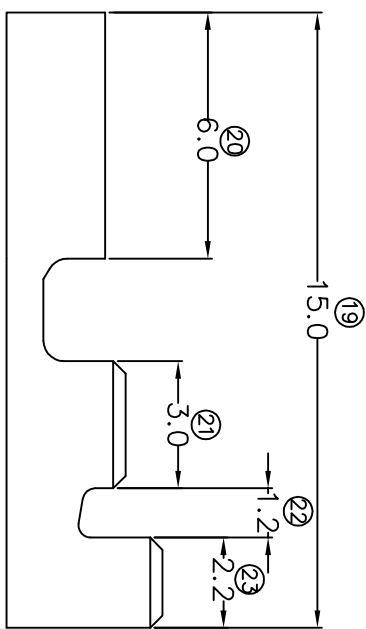


TERMINALS SPECIFICATION DRAWING

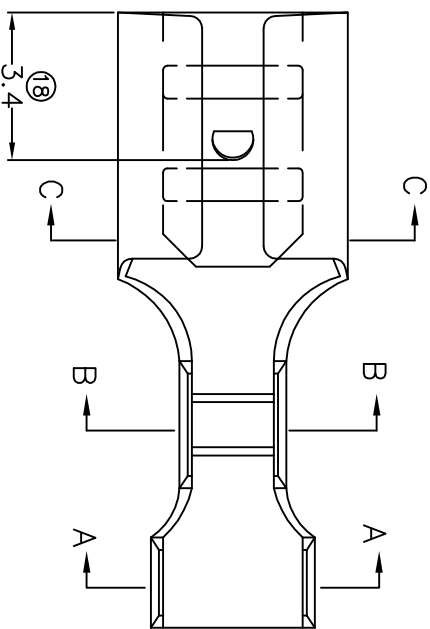

FOR REFERENCE ONLY

- 11) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 10) TEMPERATURE RANGE -40°C TD +120°C.
- 9) VOLTAGE-MAX [VOLTAGE] PER WIRE SPECIFICATION.
- 8) ⑰ FOR REFERENCE ONLY.
- 7) MATCHING WITH TAB t0.8 X W4.8.
- 6) TENSILE FORCE : MIN 2.60KG.
- 5) INSERT FORCE : MAX 3.40KG.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 9000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 3.1MM.
- 1) APPLICABLE WIRE RANGE : 1.00-0.44MM².

MATERIAL: t0.30 BRASS C2680		TIN PLATING		17187H(0.8)-2	
		NONE		17187H(0.8)-1	
		TREATMENT SELECTIVE		PART NUMBER	
DIMENSIONS : MM		DWN: KS YEOW	 Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.		
TOLERANCE UNLESS OTHERWISE SPECIFIED:		CHK: SC CHOO			
REVISION: 04		APVD: YL CHUANG			
X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50		PART NAME: 187 SERIES FEMALE TERMINALS			
		SCALE : FREE			APPLICABLE (1) TERMINALS (2) HOUSING
		DRAWING NO:			(1) 271874M(0.8)-2T
SHEET OF : 1 / 1		EFFECTIVE DATE : 17/7/07		A1381 (2) _____	

REVISION:
04
SHEET OF : 1 / 1