

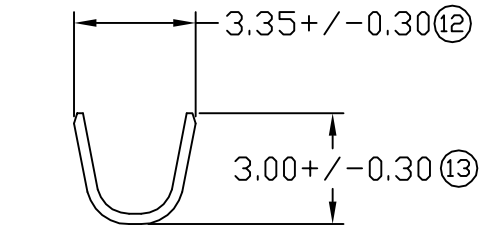



TERMINALS SPECIFICATION DRAWING

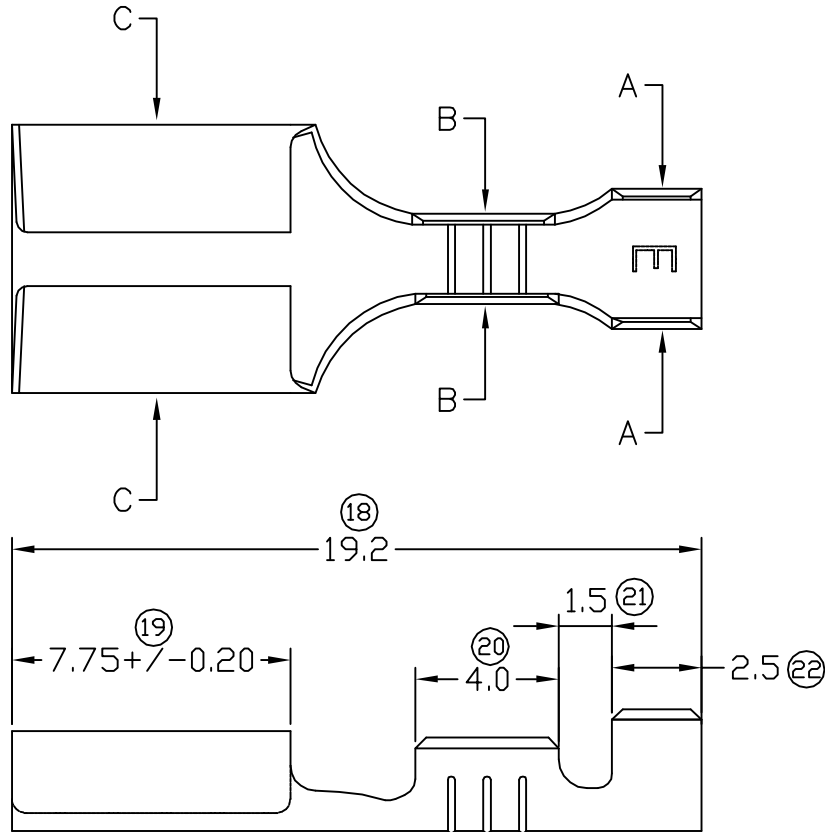

SECTION A-A

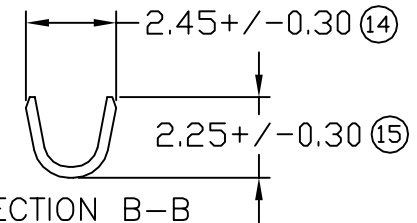

SECTION B-B

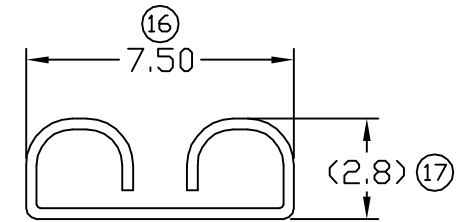


SECTION C-C

- 11) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 10) TEMPERATURE RANGE -40°C TO +120°C.
- 9) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 8) 17 FOR REFERENCE ONLY.
- 7) MATCHING WITH TAB t0.8 X W6.0.
- 6) TENSILE FORCE : MIN 0.50KG.
- 5) INSERT FORCE : MAX 1.80KG.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 5000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 1.7MM.
- 1) APPLICABLE WIRE RANGE : 0.39-0.17MM².

SPECIFICATION :

06	18/3/09	ITEM NO: ADD 172505S-2T, 5) INSERT FORCE: MAX 2.40KG CHANGE TO MAX 1.80KG. 6) TENSILE FORCE: MIN 0.60KG CHANGE TO MIN 0.50KG.
REV.	DATE	AMENDMENT

REVISION:
06



SHEET OF :
1 / 1

FOR REFERENCE ONLY

MATERIAL:
t0.30 BRASS
C2680

DIMENSIONS : MM

TOLERANCE UNLESS
OTHERWISE SPECIFIED:

X.XXX +/-0.05
X.XX +/-0.10
X.X +/-0.20
X +/-0.50

EFFECTIVE DATE :
18/3/09

PRE-TIN PLATED	172505S-2T
TIN PLATING	172505S-2
NONE	172505S-1
TREATMENT SELECTIVE	PART NUMBER
DWN: KS YEW	EPI Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd. PART NAME: 250 SERIES FEMALE TERMINALS APPLICABLE (1) TERMINALS (2) HOUSING (1) 272505 S/M/H (2) CN2FSL SERIES
CHK: C.Y CHUANG	
APVD: Y.L CHUANG	
SCALE : FREE	
DRAWING NO: A1309	