
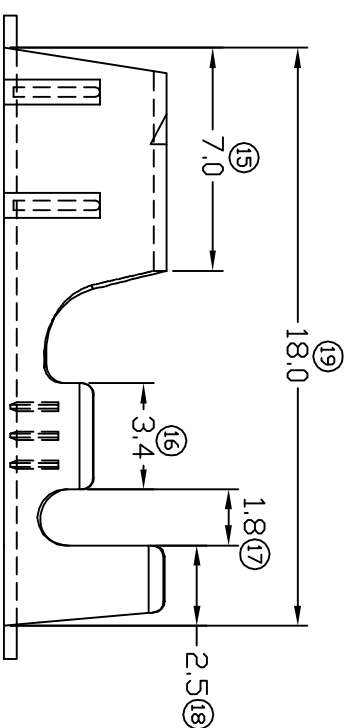
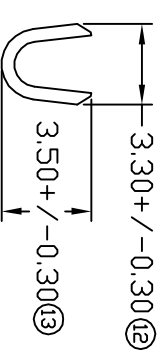
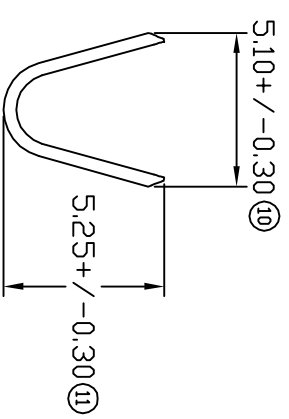
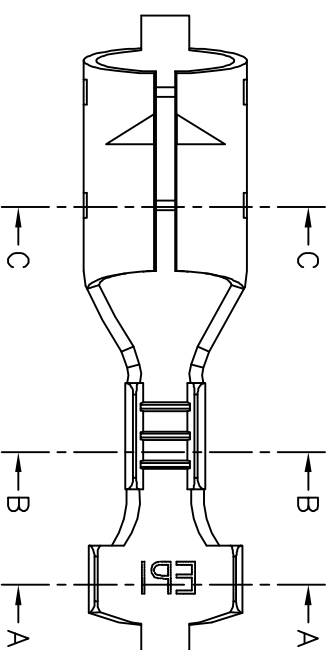


TERMINALS SPECIFICATION DRAWING

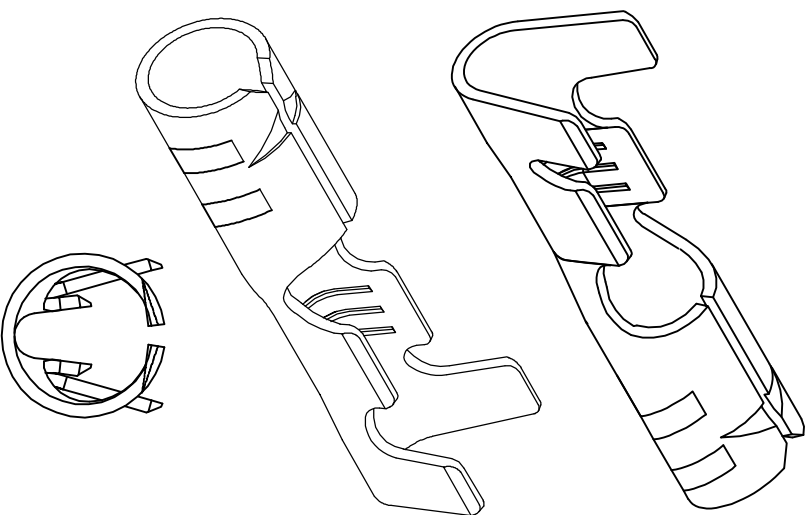

- 9) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 8) TEMPERATURE RANGE : -40°C TO +120°C.
- 7) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 6) TENSILE FORCE : MIN 2.50KG.
- 5) INSERT FORCE : MAX 4.50KG.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 8000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 3.0MM.
- 1) APPLICABLE WIRE RANGE : 1.11-0.49MM².

SPECIFICATION :

FOR REFERENCE ONLY

SPECIFICATION :		OTHERWISE SPECIFIED:		PART NAME:	
		REVISION:	APVD: Y.L	ø4.00MM BULLET TERMINALS	
		01	X.XXX +/-0.05		
			X.XX +/-0.10		
			X.XX +/-0.20		
			X +/-0.50		
01	12/11/08	CHANGE DIM FR 15 TO 7.0			
REV.	DATE	AMENDMENT	SHEET OF :	EFFECTIVE DATE :	
			1 / 1	12/11/08	
				APVD: CHUANG	
				SCALE : FREE	
				DRAWING NO:	
				A1521	
					(1) 28041
					(2) -

MATERIAL: to .35 BRASS C2680	TIN PLATING		18041A-2
	NONE		18041A-1
	TREATMENT SELECTIVE	PART NUMBER	
DIMENSIONS : MM	DWN: KS YEW	 Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.	
TOLERANCE UNLESS OTHERWISE SPECIFIED:	CHK: ^{LY} CHUANG	PART NAME:	
	APVD: YL CHUANG	ø4.00MM BULLET TERMINALS	
	SCALE : FREE	APPLICABLE (1) TERMINALS (2) HOUSING	
	DRAWING NO:	(1) 28041	
EFFECTIVE DATE : 12/11/08	A1521	(2) -	