


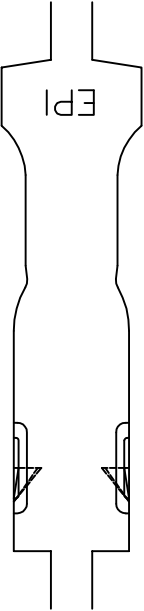
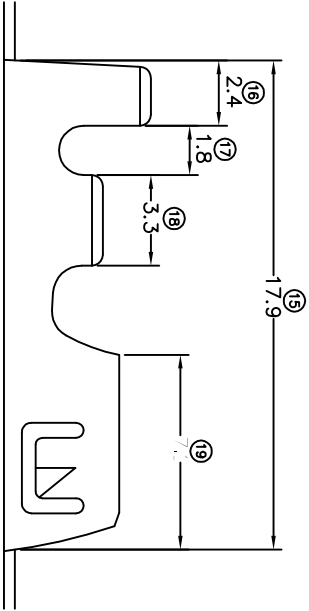



TERMINALS SPECIFICATION DRAWING

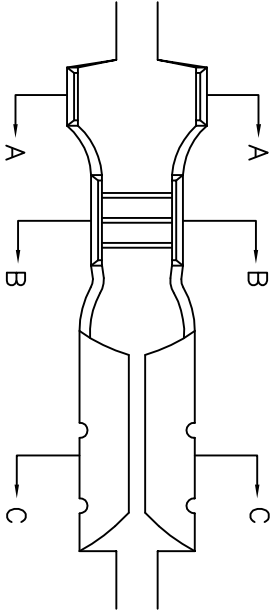

SECTION A-A



SECTION B-B

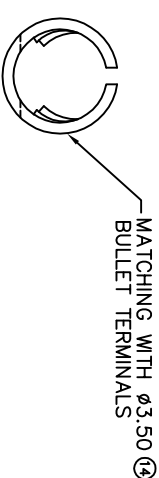

SECTION C-C

FOR REFERENCE ONLY

- 9) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 8) TEMPERATURE RANGE -40°C TD +120°C.
- 7) VOLTAGE-MAX [VDLTS] PER WIRE SPECIFICATION.
- 6) TENSILE FORCE : MIN 2.60KG.
- 5) INSERT FORCE : MAX 3.25KG.
- 4) THICKNESS PLATING MORE THAN 40µ INCH.
- 3) PACKING QTY : 8000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 3.0MM.
- 1) APPLICABLE WIRE RANGE : 1.53-0.78MM².

SPECIFICATION :

MATERIAL: to.40 BRASS C2680	TIN PLATING		18041B-2
	NONE		18041B-1
	TREATMENT SELECTIVE		PART NUMBER
DIMENSIONS : MM	DWN: KS YEW	EPI Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.	
TOLERANCE UNLESS OTHERWISE SPECIFIED:	CHK: S.C.CHOO		
	APVD: CHUANG		
X:xxx +/-0.05	Y.L	PART NAME: 4.0MM DIA. BULLET TERMINALS	
X:xx +/-0.10	SCALE : FREE		
X:X +/-0.20	DRAWING NO:		
X +/-0.50		APPLICABLE (1) TERMINALS (2) HOUSING	
EFFECTIVE DATE : 24/7/07	A1474	(1) 28041	
SHEET OF : 1 / 1		(2) -	