


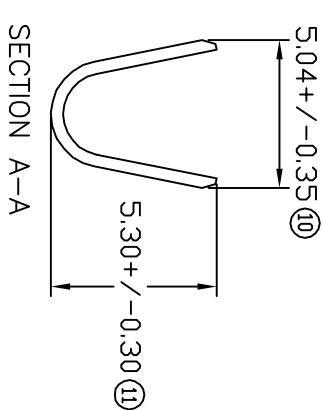
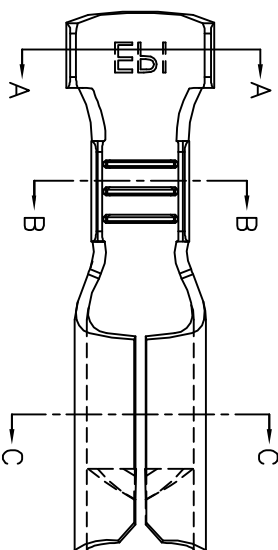


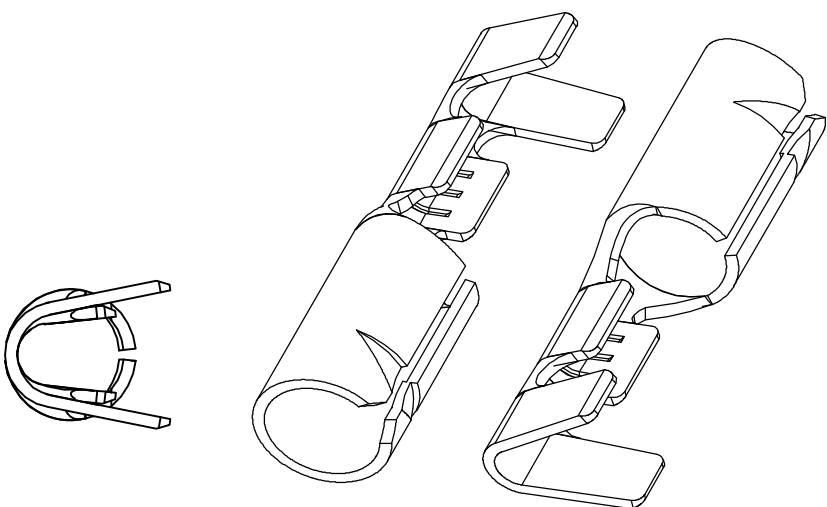

SECTION A-A

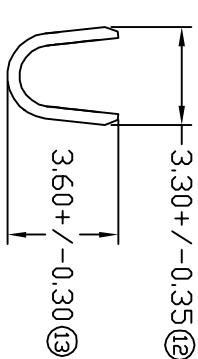

SECTION B-B

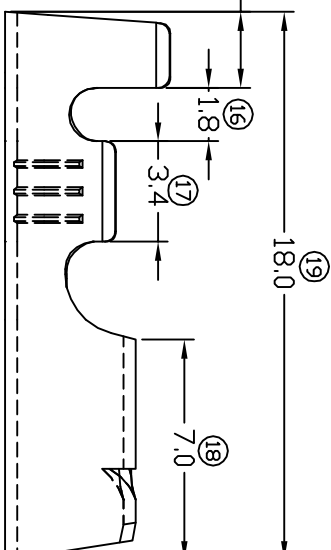

SECTION C-C

- 9) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 8) TEMPERATURE RANGE -40°C TO +120°C.
- 7) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 6) TENSILE FORCE : MIN 2.00KG.
- 5) INSERT FORCE : MAX 4.00KG.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 8000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 3.0MM.
- 1) APPLICABLE WIRE RANGE : 1.54~0.78MM².

SPECIFICATION :

FOR REFERENCE ONLY

REVISION:

01



SHEET OF :

1 / 1

01	14/11/08	CHANGE DIM FR (10) 5.0±0.3 TO 5.04±0.35, FR (12) 3.3±0.30 TO 3.30±0.35
00	22/5/08	NEW RELEASE
REV.	DATE	AMENDMENT

MATERIAL: to.40 BRASS C2680		TIN PLATING		18051-2
DIMENSIONS : MM		TREATMENT SELECTIVE		18051-1
TOLERANCE UNLESS OTHERWISE SPECIFIED:		PART NAME:		18051-1
X.XXX +/-0.05		EPI Terminals & Connectors		18051-1
X.XX +/-0.10		Elamp Precision Industry(M) Sdn.Bhd.		18051-1
X.X +/-0.20		PART NAME:		18051-1
X +/-0.50		ø5.00 BULLET TERMINALS		18051-1
EFFECTIVE DATE : 14/11/08		APPLICABLE (1) TERMINALS (2) HOUSING		18051-1
APVD: Y.L		(1) 28051		18051-1
CHK: CHUANG		(2) -		18051-1
DWN: KS YEW		DRAWING NO: A1496		18051-1