
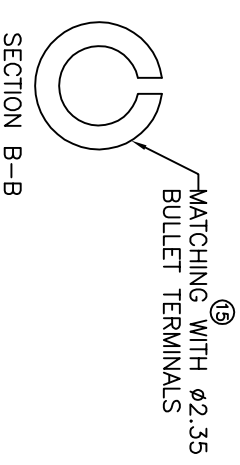

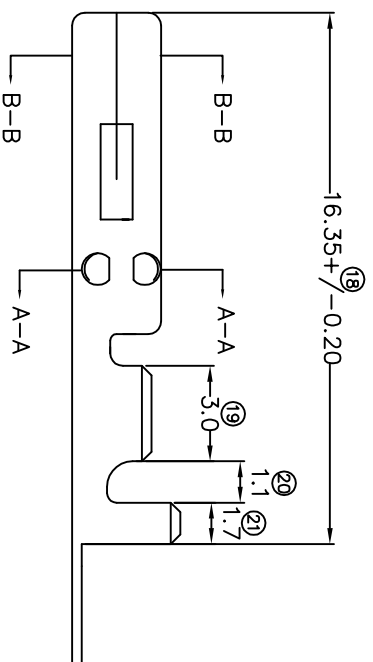
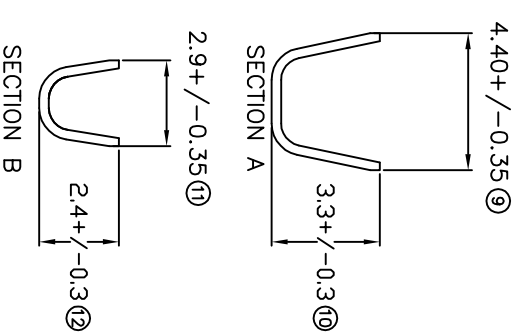


TERMINALS SPECIFICATION DRAWING

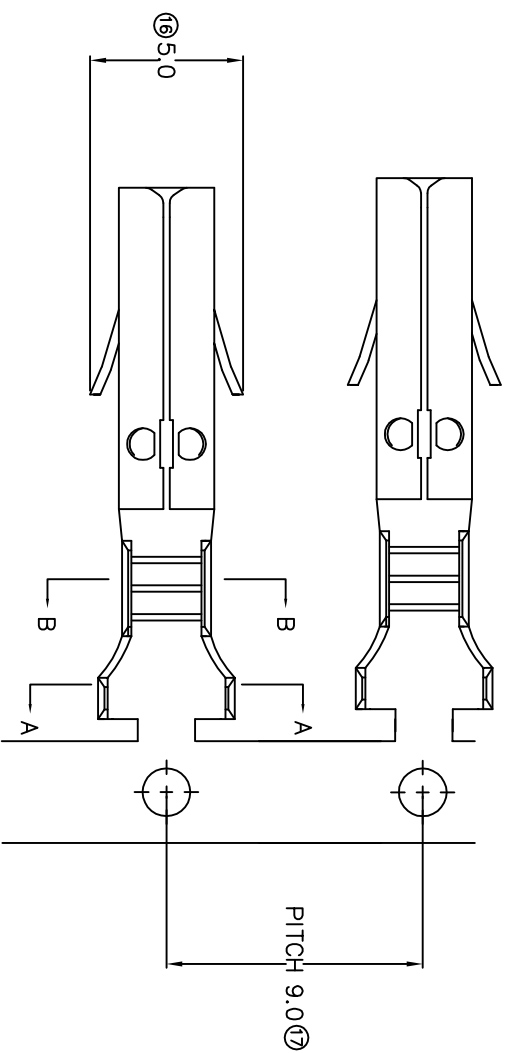

FOR REFERENCE ONLY

- 8) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 7) TEMPERATURE RANGE -40°C TO +120°C.
- 6) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 5) TENSILE FORCE : MIN 0.55KG. (TEST WITH $\phi 2.34$ ELAMP PIN)
- 4) INSERT FORCE : MAX 1.8KG.
- 3) PACKING QTY : 7000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.1MM.
- 1) APPLICABLE WIRE RANGE : 0.56-0.25MM².

SPECIFICATION :

MATERIAL: t0.30 BRASS		C2680	
DIMENSIONS : MM		TOLERANCE UNLESS OTHERWISE SPECIFIED:	
X:XXX +/-0.05		X:XX +/-0.10	
X:XX +/-0.10		X:X +/-0.20	
X:X +/-0.50		X:X +/-0.50	
EFFECTIVE DATE : 23/8/07		A1368	
TREATMENT SELECTIVE		PART NUMBER	
NONE		18235B-1	
DWN:KS YEW		CHK: SC CHOO	
APVD: CHUANG		SCALE : FREE	
DRAWING NO:		PART NAME:	
(1) -		DIA. 2.35 MM ROUND PIN TERMINALS	
(2) -		APPLICABLE (1) TERMINALS (2) HOUSING	
SHEET OF : 1 / 1		REVISION: 02	
1		2	