


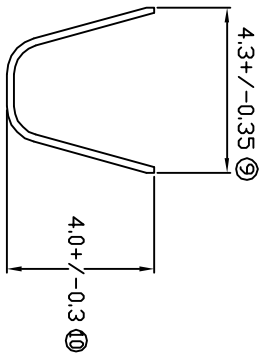
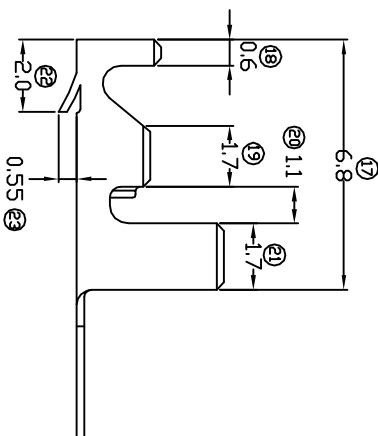


TERMINALS SPECIFICATION DRAWING

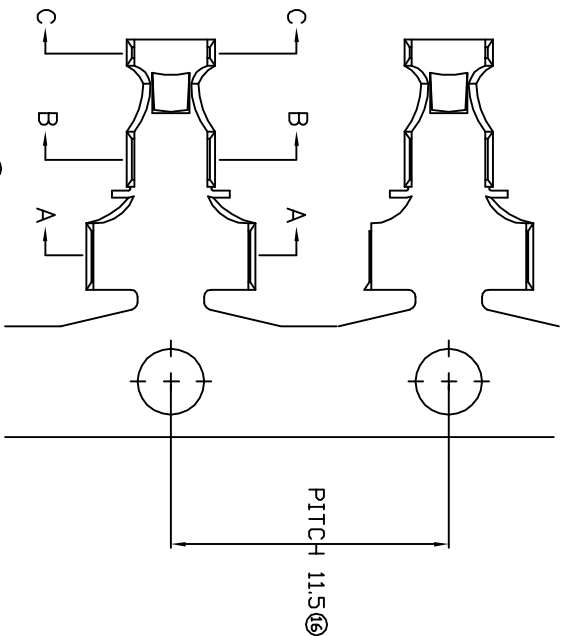

FOR REFERENCE ONLY

- 8) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 7) TEMPERATURE RANGE -40°C TO +120°C.
- 6) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 5) FOR PC BOARD Ø1.85.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 4000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.4MM.
- 1) APPLICABLE WIRE RANGE : 0.34-0.15MM².

SPECIFICATION :

MATERIAL: to.20 BRASS C2680		PRE-TIN PLATED		22185-2T	
DIMENSIONS : MM		TREATMENT SELECTIVE		PART NUMBER	
		EPI Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.			
TOLERANCE UNLESS OTHERWISE SPECIFIED:		DWN: KS YEW		PART NAME:	
CHK: SC CHOO		APVD: Y.L CHUANG		BOARD-IN CRIMP STYLE TERMINALS	
REVISION: 04		SCALE : FREE		APPLICABLE (1) TERMINALS (2) HOUSING	
X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X.X +/-0.50		DRAWING NO:		(1) - (2) -	
SHEET OF : 1 / 1		EFFECTIVE DATE : 19/9/07		A1316	

REVISION:

04

