


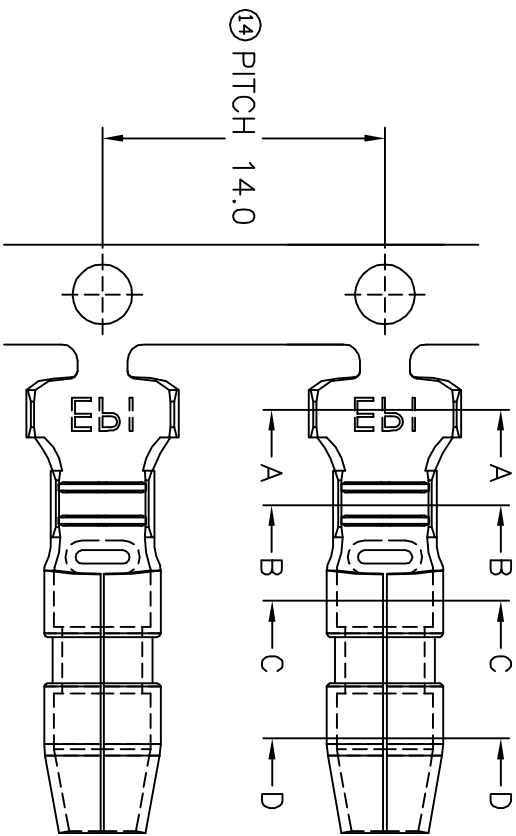


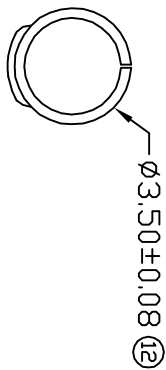


SECTION C-C

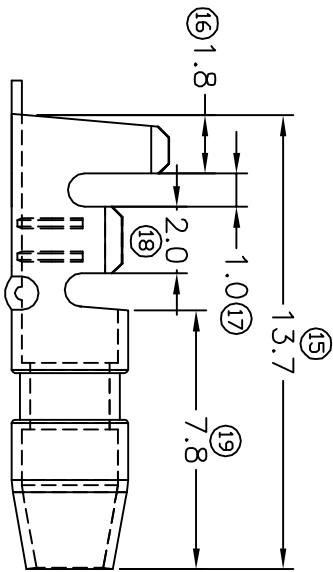


SECTION A-A

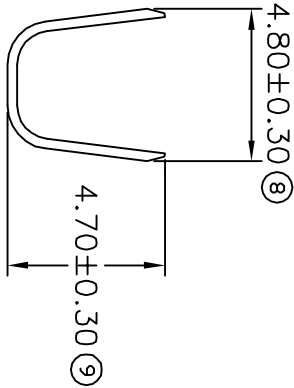

SECTION D-D

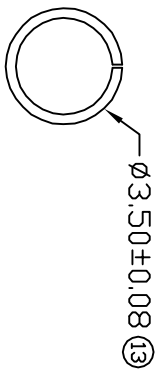

SECTION B-B

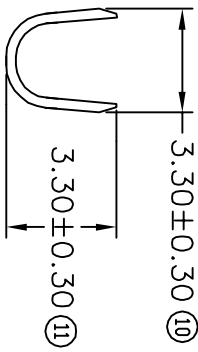

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40 $\pm$ 3C TO +120 $\pm$ 3C.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION
- 4) THICKNESS PLATING MORE THAN 40 μ INCH.
- 3) PACKING QTY : 3000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.9MM.
- 1) APPLICABLE WIRE RANGE : 1.00 $\sim$ 0.44MM².

SPECIFICATION :

FOR REFERENCE ONLY

MATERIAL:		NONE	
BRASS t0.30		TIN PLATING	
C2680		TREATMENT SELECTIVE	
DIMENSIONS : MM		PART NUMBER	
TOLERANCE UNLESS OTHERWISE SPECIFIED:		PART NAME:	
X.XXX +/-0.05		Epi Terminals & Connectors	
X.XX +/-0.10		Elamp Precision Industry(M) Sdn.Bhd.	
X.X +/-0.20		4.0MM DIA. BULLET TERMINALS	
X +/-0.50		APPLICABLE (1) TERMINALS (2) HOUSING	
EFFECTIVE DATE : 11/8/08		(1) 18041	
SHEET OF : 1 / 1		(2) -	
REVISION:		DRAWING NO:	
TEMP		A1529	
FOR TRIAL RUN ONLY			
TEMP. 11/8/08			
REV. DATE			