
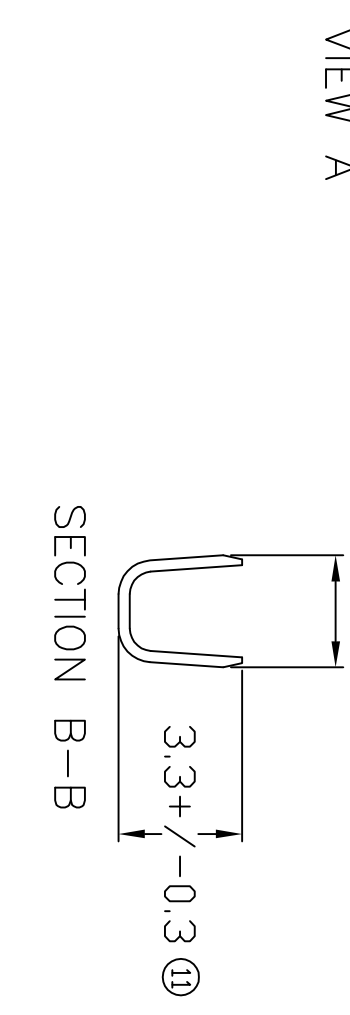
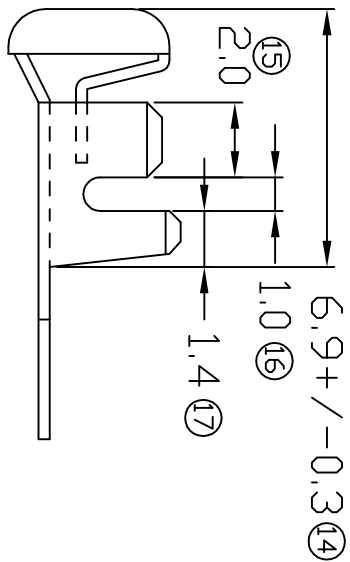
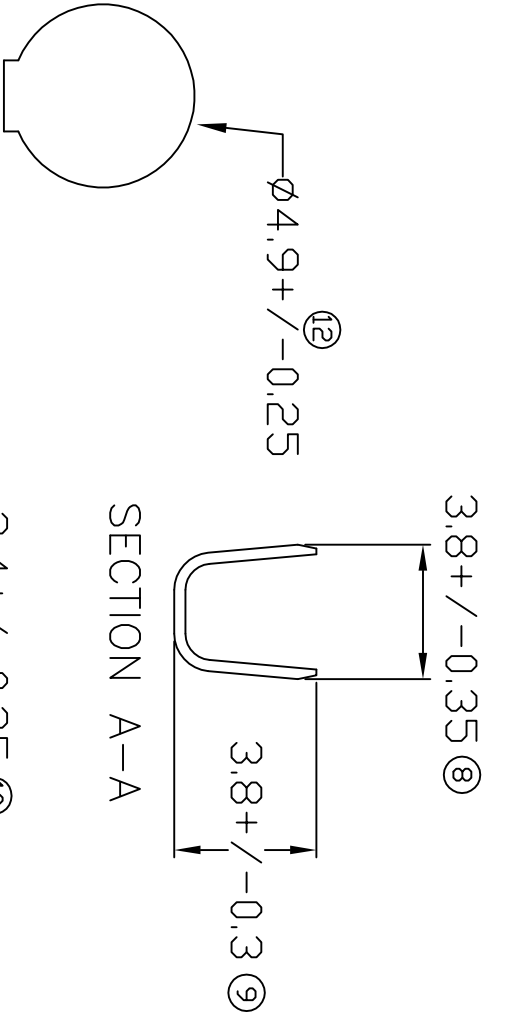


TERMINALS SPECIFICATION DRAWING

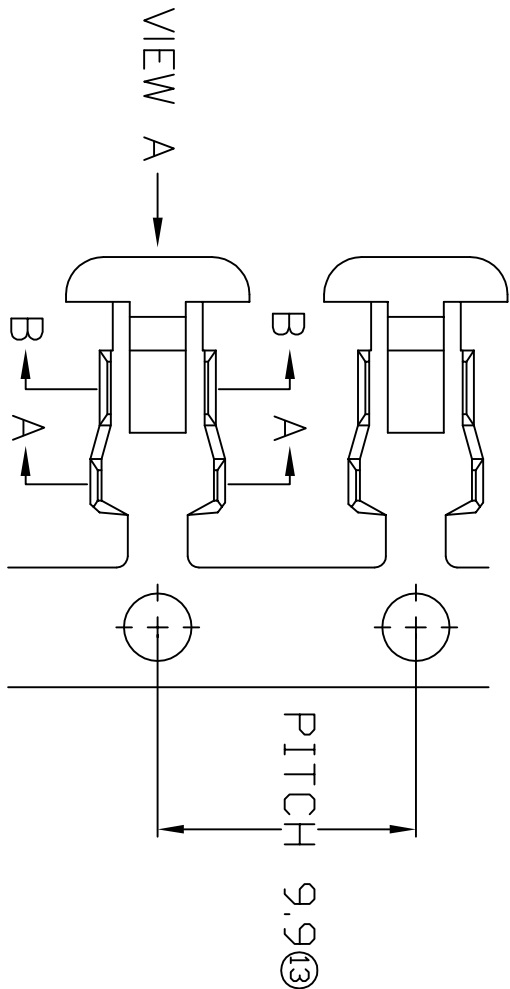

FOR REFERENCE ONLY

- 1) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 2) TEMPERATURE RANGE -40°C TO +120°C.
- 3) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 5) PACKING QTY : 5000 PCS/REEL.
- 6) WIRE INSULATION (O.D) : 2.3MM.
- 7) APPLICABLE WIRE RANGE : 1.06-0.47MM² .

SPECIFICATION :

MATERIAL:		PRE-TIN PLATED		37045-2T	
t0.30 BRASS		TIN PLATING		37045-2	
C2680		NONE		37045-1	
DIMENSIONS : MM		TREATMENT SELECTIVE		PART NUMBER	
DWN: KS YEW		EPI		Terminals & Connectors	
TOLERANCE UNLESS OTHERWISE SPECIFIED:		Elamp Precision Industry(M) Sdn.Bhd.			
X.XXX +/-0.05		APVD: YL		PART NAME:	
X.XX +/-0.10		SCALE: FREE		BUTTON CONTACT FOR FUSE HOLDER	
X.X +/-0.20		DRAWING NO:		APPLICABLE (1) TERMINALS (2) HOUSING	
X +/-0.50		(1) -		(2) FH035/FH044	
SHEET OF : 1 / 1		EFFECTIVE DATE : 29/10/07		A1278	