


TERMINALS SPECIFICATION DRAWING

UNCONTROLLED COPY

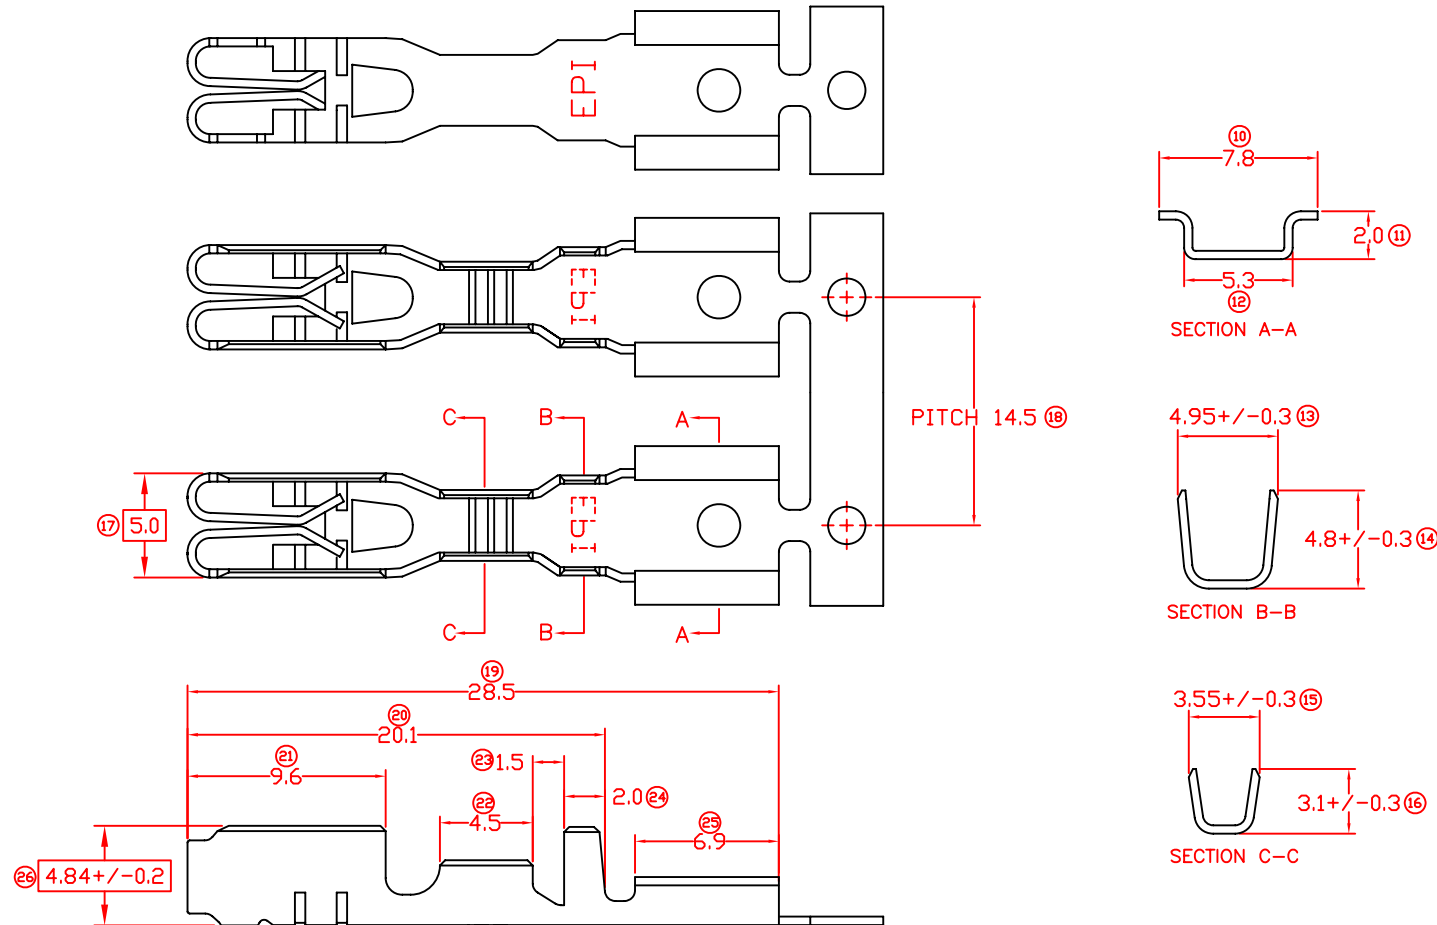


□ MATCHING DIMENSION

- 9) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 8) TEMPERATURE RANGE -40°C TO $+120^{\circ}\text{C}$.
- 7) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 6) TENSILE FORCE : MIN 0.40KG.
- 5) INSERT FORCE : MAX 1.70KG.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 2500 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 3.2MM.
- 1) APPLICABLE WIRE RANGE : 1.34-0.69MM².

SPECIFICATION :

REV.	DATE	AMENDMENT
02	28/9/10	CHANGE (5) INSERT FORCE MAX 2.00KG TO MAX 1.70KG, FR (6) TENSILE FORCE MIN 0.55KG TO 0.40KG

REVISION:
02



SHEET OF :
1 / 1

FOR REFERENCE ONLY

MATERIAL:
t0.40 BRASS
C2680

DIMENSIONS : MM

TOLERANCE UNLESS OTHERWISE SPECIFIED:

X.XXX ± 0.05
X.XX ± 0.10
X.X ± 0.20
X ± 0.50

EFFECTIVE DATE :
28/9/10

-		-
PRE-TIN PLATED		37900M-2T
TREATMENT SELECTIVE		PART NUMBER
PREPARE BY: KS YEW	Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.	
REVIEWED BY: CH ANG		
APPROVED BY: CY CHUANG	PART NAME:	
SCALE : FREE	TERMINALS FOR FUSE	
DRAWING NO: A1460	APPLICABLE (1) TERMINALS (2) HOUSING	
	(1) CAR FUSE	
	(2) FB02FN	