


TERMINALS SPECIFICATION DRAWING

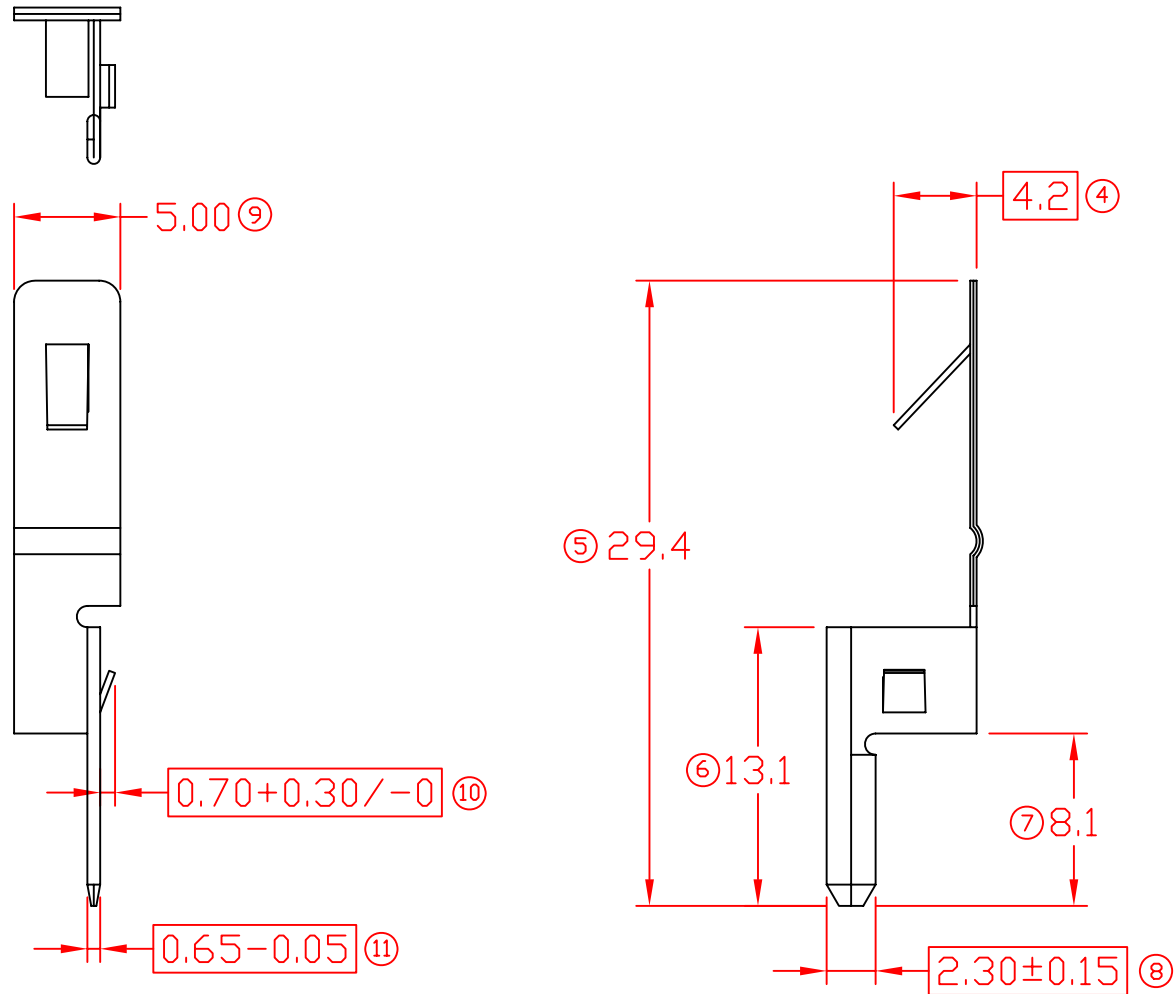

□ MATCHING DIMENSION


- 3) TEMPERATURE RANGE -40°C TO $+120^{\circ}\text{C}$.
 2) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
 1) PACKING QTY : 2000 PCS/BAG.

SPECIFICATION :

FOR REFERENCE ONLY

REV.	DATE	AMENDMENT
04	31/5/11	1)PACKING QTY: FR 500 CHANGE TO 2000 & ADD MATCHING DIMENSION, FR ⑤ 29.40±0.30 CHANGE TO 29.4, FR ⑧ 2.3 TO 2.30±0.15, ⑩ 1.10+0.2/-0.1 TO 0.70+0.30/-0

REVISION:
04



SHEET OF :
1 / 1

MATERIAL: t0.30 PHOSPHOR BRONZE C5191	CUSTOMER P/N		9 300 001 507
	NONE		AL6002PA-1
	TREATMENT SELECTIVE		PART NUMBER
DIMENSIONS : MM TOLERANCE UNLESS OTHERWISE SPECIFIED: X.XXX $\pm/-0.05$ X.XX $\pm/-0.10$ X.X $\pm/-0.20$ X $\pm/-0.50$	PREPARE BY:	 Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.	
	KS YEW		
	REVIEWED BY:	PART NAME: EARTH CONTACTS TERMINALS	
	CH ANG		
	APPROVED BY:	APPLICABLE (1) TERMINALS (2) HOUSING (1) - (2) AL6002BK-C	
	CY CHUANG		
SCALE : FREE			
DRAWING NO: A1400			
EFFECTIVE DATE : 31/5/11			