


MASTER COPY

SYMBOL	DESCRIPTION
	DIMENSION INSPECTED DURING SETUP AND OUTGOING
	DIMENSION INSPECTED HOURLY.
	STATISTICALLY CONTROLLED DIMENSION.
	JIG USED DURING INSPECTION.

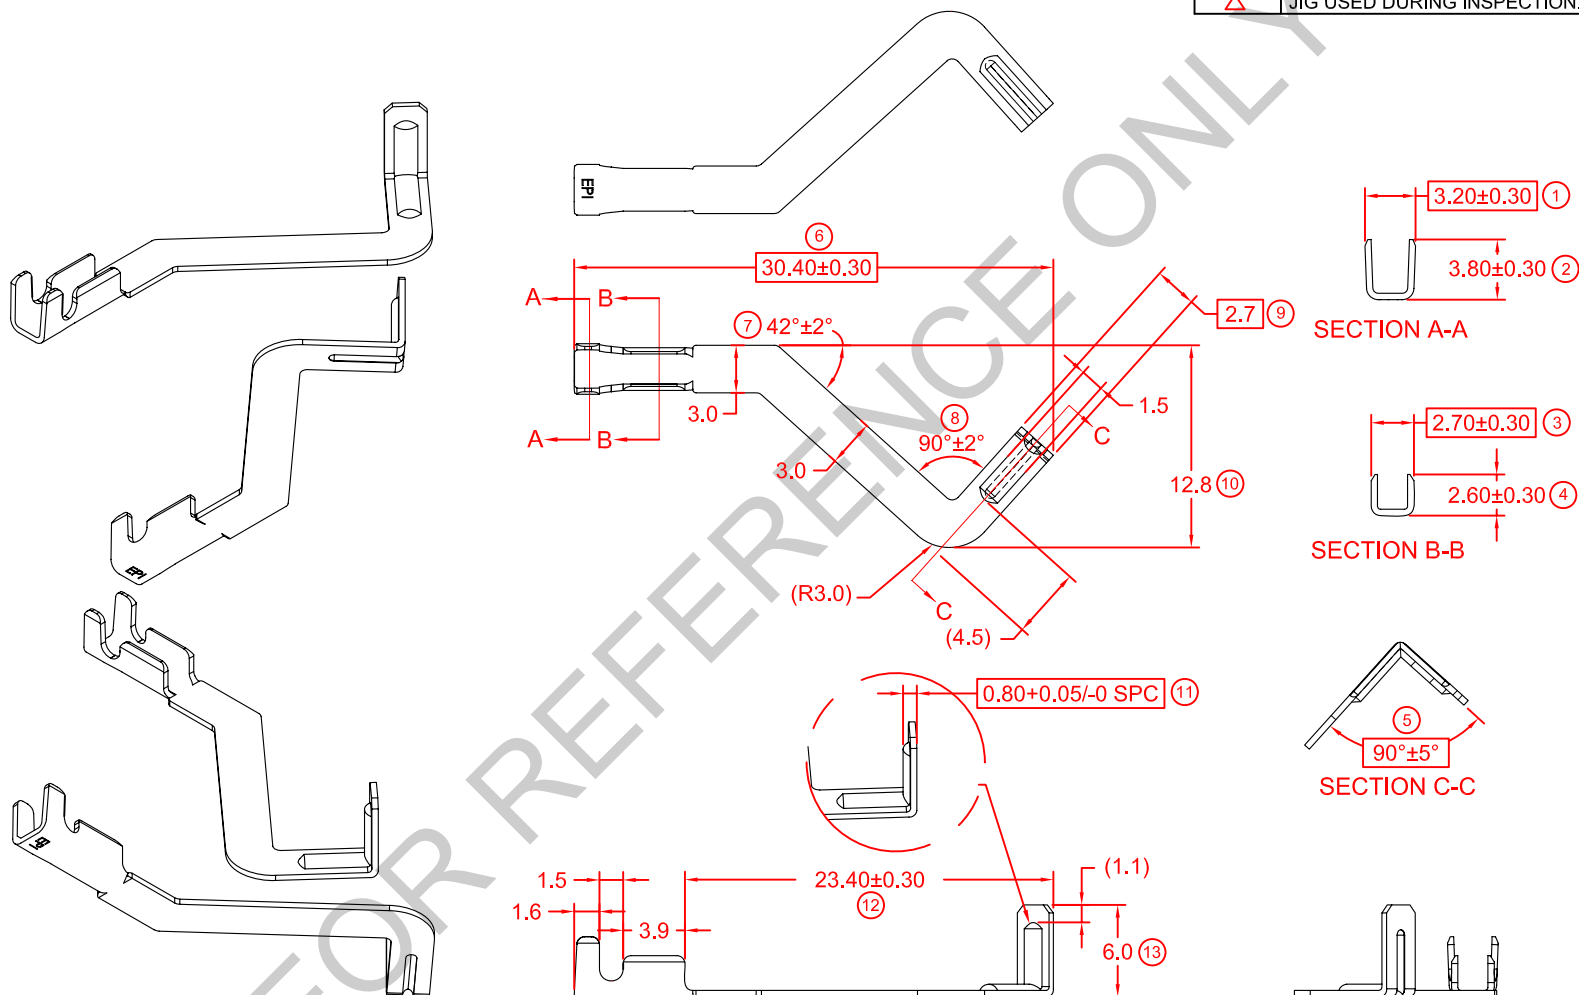

a) PLATING THICKNESS MIN 40μ INCH
b) SUGGESTED WIRE INSULATION (O.D): 2.3MM
c) SUGGESTED WIRE RANGE: 1.03~0.52MM² (AWG16~20)

a) PLATING THICKNESS MIN 40μ INCH b) SUGGESTED WIRE INSULATION (O.D): 2.3MM c) SUGGESTED WIRE RANGE: 1.03~0.52MM² (AWG16~20)				GENERAL TOLERANCE UNLESS SPECIFIED:		PREPARE BY: KS YEOW		 Elamp Precision Industry(M) Sdn.Bhd.
				X.XXX ±0.05 X.XX ±0.10 X.X ±0.20 X ±0.50		REVIEWED BY: CH ANG		
						APPROVED BY: CY CHUANG		ITEM NO: DLT001-2T
01	9/9/11	UPDATE TO NEW FORMAT	-	SHEET OF:	EFFECTIVE DATE:	SCALE : FREE	DRAWING NO: EP-Q-434A	
REV.	DATE	AMENDMENT	ECR NO:	1 / 1	9/9/11	UNIT : MM		