


TERMINALS SPECIFICATION DRAWING

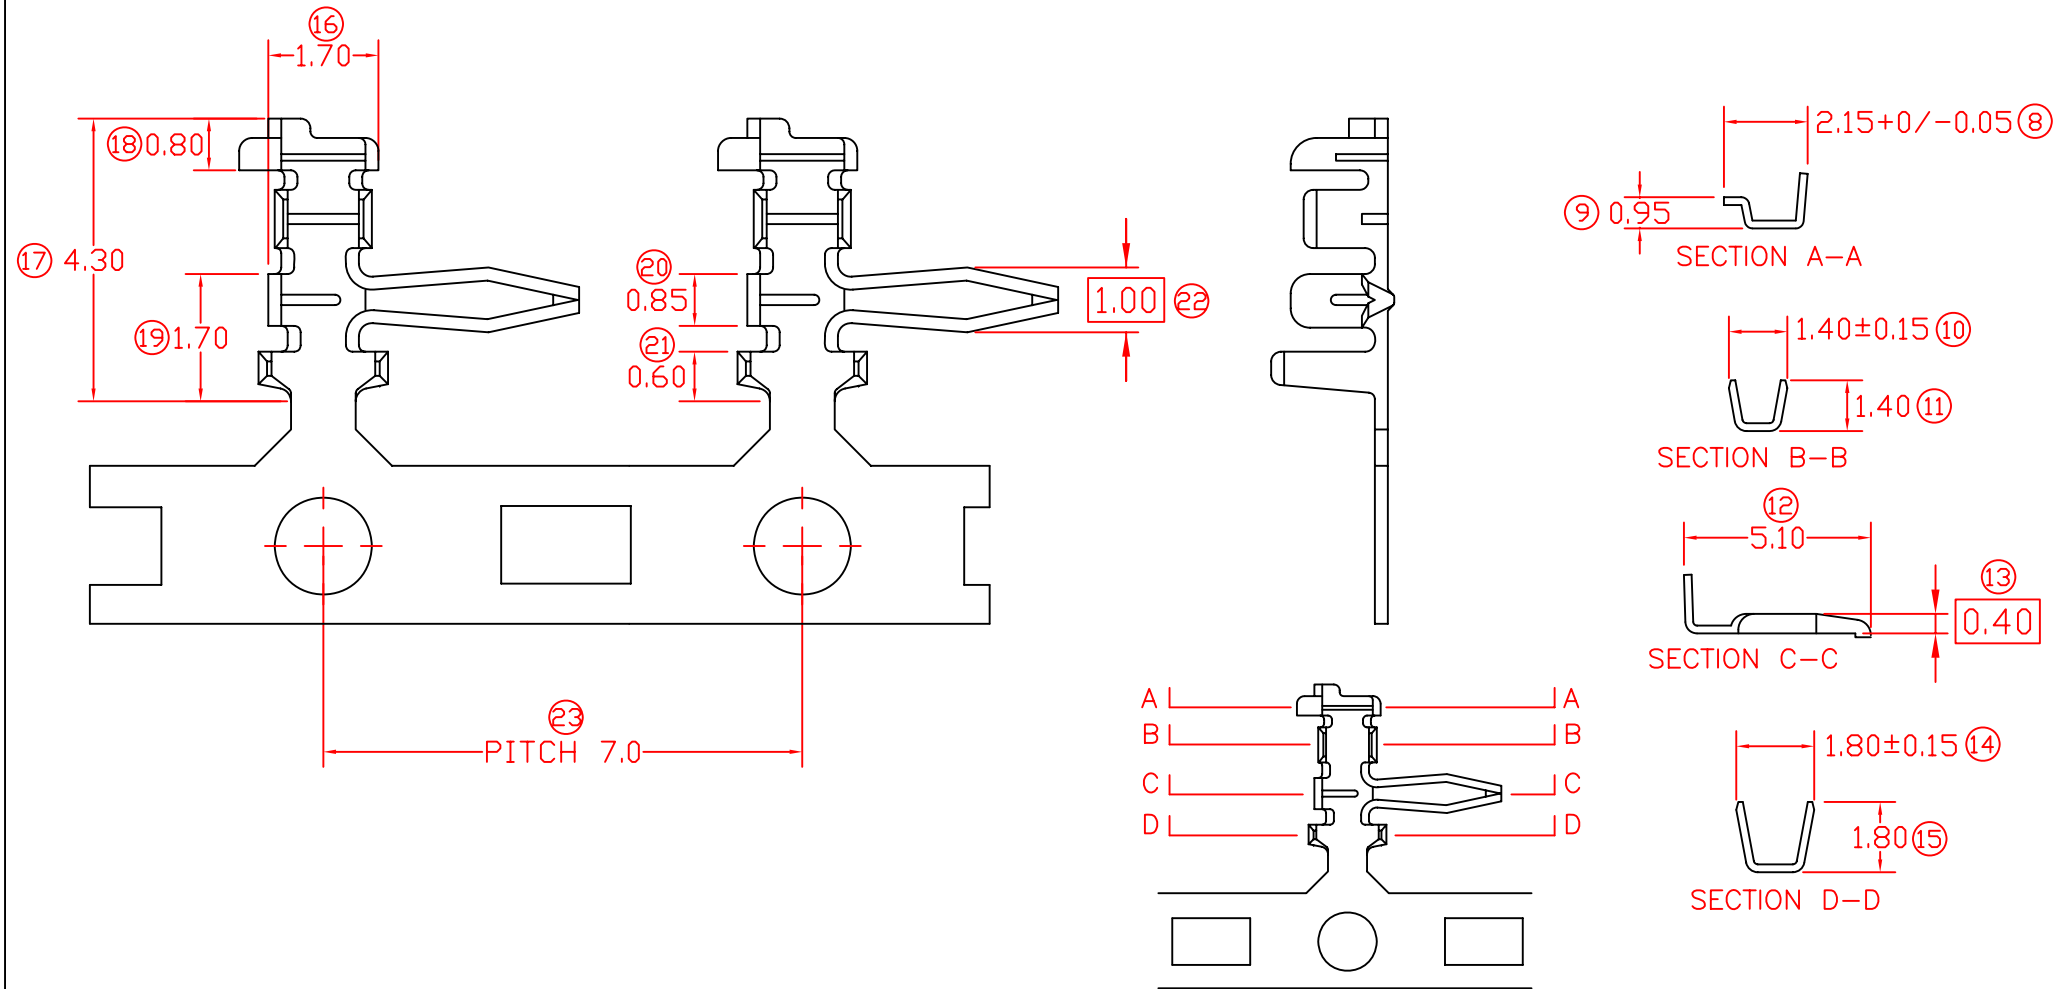


□ MATCHING DIMENSION

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TO +120°C.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 10000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 1.1MM.
- 1) APPLICABLE WIRE RANGE : 0.18~0.08MM².

SPECIFICATION :

FOR REFERENCE ONLY

			REVISION: 03		EFFECTIVE DATE : 8/6/11	DRAWING NO: A1337	PART NAME: P.C. BOARD INTERCONNECTORS
03	8/6/11	FR ⑨ 0.800 CHANGE TO 0.95, FR ⑫ 4.90 CHANGE TO 5.10, FR ⑬ 0.400 TO 0.40, FR ⑰ 4.10 TO 4.30, FR ⑱ 1.00 TO 0.80, FR ⑳ 0.70 TO 0.85, FR ㉑ 1.000 TO 1.00					
REV.	DATE	AMENDMENT	SHEET OF : 1 / 1				APPLICABLE (1) TERMINALS (2) HOUSING (1) - (2) JMB20H

MATERIAL:
t0.20 BRASS
C2680

DIMENSIONS : MM

TOLERANCE UNLESS
OTHERWISE SPECIFIED:

X.XXX +/ - 0.05
X.XX +/ - 0.10
X.X +/ - 0.20
X +/ - 0.50

PRE-TIN PLATED

TIN PLATING

TREATMENT SELECTIVE

JMB20R-2T

JMB20R-2

PART NUMBER

PREPARE BY:
GT SOH

REVIEWED BY:
CH ANG

APPROVED BY:
CY CHUANG

SCALE : FREE



Terminals & Connectors
Elamp Precision Industry(M) Sdn.Bhd.